

17 YEARS
OF INNOVATION
1989 - 2006

TERMINATOR™ DUO

Model 2222 Two-Way Audio Module



FULLY INTEGRATED, QUICK-CONNECT TWO-WAY AUDIO VERIFICATION MODULE THAT INCLUDES AUTO-VOX SWITCHING, AUTO-TRIP ACTIVATION, ZONED MIC'S, AND EXPANSION & SYSTEM ARM / DISARM CAPABILITIES.

The EAGLE Model 2222, a.k.a. FALSE ALARM TERMINATOR™ DUO, combines VOX and manual switching along with optional hi-power manual only override for maximum system control. Redesigned from its predecessor, the 1242, the new 2222 features **expansion capability** via the optional 1423 Speaker & Mic Expansion Module. It is the dealer's choice for fast installations with minimum set-up requirements. Microprocessor controlled two-way audio technology provides **central station detection** with Eagle's **exclusive auto-disconnect** feature, extensive central station control features and call back capability. Central station personnel can invoke high-gain talk and high-gain listen capabilities on demand. **Automatic warning tones**, built-in **adjustable speaker amplifier** and 2-Amp DPDT disconnect relay are standard. The TERMINATOR™ DUO features **modular telephone connectors** and a **quick connect** terminal block connection for speakers and microphones. The power microphone with EMT™ requires only **two (2) standard wires**; no shielding required! **User defined access codes** (on EEPROM version) provide maximum security for call-backs. Options include **speaker & mic expansion** and and remote arm/disarm capabilities build into add-on modules. The **full integration** and **installer-friendly** design of the TERMINATOR™ DUO make it ideal for **fast, efficient installations**.

SYSTEM COMPATIBILITY


The EAGLE TERMINATOR™ DUO is compatible with **all control panels available today**.

ADDITIONAL OPTIONS

EAGLE 1423 Speaker & Mic Expansion Module
EAGLE 2172W-CC Conformal Coated Remote Mic
EAGLE 2172S Surface Mount Speaker/Mic
EAGLE 2172F Flush Mount Speaker/Mic
EAGLE 1403 Remote Controlled Relay Module
EAGLE 2150S Surface Mount Speaker
EAGLE 2150F Flush Mount Speaker
EAGLE 2102P Microphone & Mounting Plate
EAGLE 1262-2 2.5A Audio Grade Power Supply

ORDERING INFORMATION

P/N: 302222 - DIP Switch Version
P/N: 302222EE - EEPROM Version

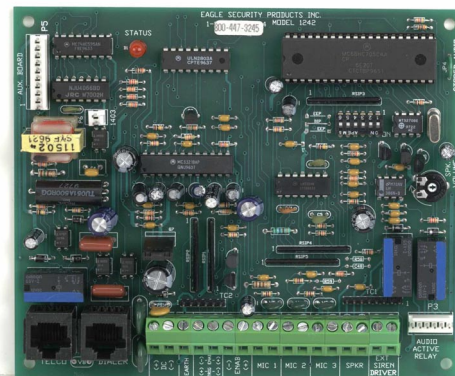

FEATURES

- ◆ VOX & manual control
- ◆ Expandable Mics & Speakers via Model 1423
- ◆ Upgradable firmware (factory only)
- ◆ Optional hi-power manual only feature
- ◆ Auto-Trip Function
- ◆ Watchdog power circuit
- ◆ SIA command compliant
- ◆ Three microphone zones
- ◆ Two wire power microphones with EMT™
- ◆ LED status indicator
- ◆ User defined access codes (EEPROM only)
- ◆ 24/7 Call back capability (EEPROM only)
- ◆ Integrated Siren Driver
- ◆ Dual Trigger Circuit (positive & negative edges)
- ◆ Two Dual Trip Circuit (Enable Input)
- ◆ Built in Auto Answering w/ Ans. Machine Bypass
- ◆ Central Station Detection/Auto Disconnect
- ◆ Dual Form C (DPDT) Siren Disconnect Relays
- ◆ Last Minute & Last 30 Seconds Warning Tones
- ◆ Beep/Warning Disable Function
- ◆ On-Board Speaker Volume Adjust
- ◆ Extend and Hang-up Features
- ◆ Over current protection (auto-reset polyfuse)
- ◆ Polarity reversal protection

SPECIFICATIONS

Dimensions: 5.00" x 6.00" x 1"
Power: Voltage: 12 VDC ± 2 VDC
Current (Standby/Active): 10 mA/180 mA
Trip Current: Maximum: 0.5 mA (500 uA)

WARRANTY

All EAGLE Security Products, Inc. Products are backed by our standard "out-of-the-box" failure warranty: If it's bad, we'll replace it. Contact EAGLE for details.

All specifications preliminary & subject to change w/o notice.

11650 Genesee St. Suite #2, Alden, NY 14004-9630

Tel: 716.937.0095 Fax: 716.937.3127

SALES INFORMATION: 1-800-334-7188
email: sales@eagle-security.com
© 2006 Eagle Security Products, Inc.

TECHNICAL SUPPORT: 800-447-E3 A2 G4 L5 E
http://www.eagle-security.com
Rev 1.1 4/06